






NOVAR E39U

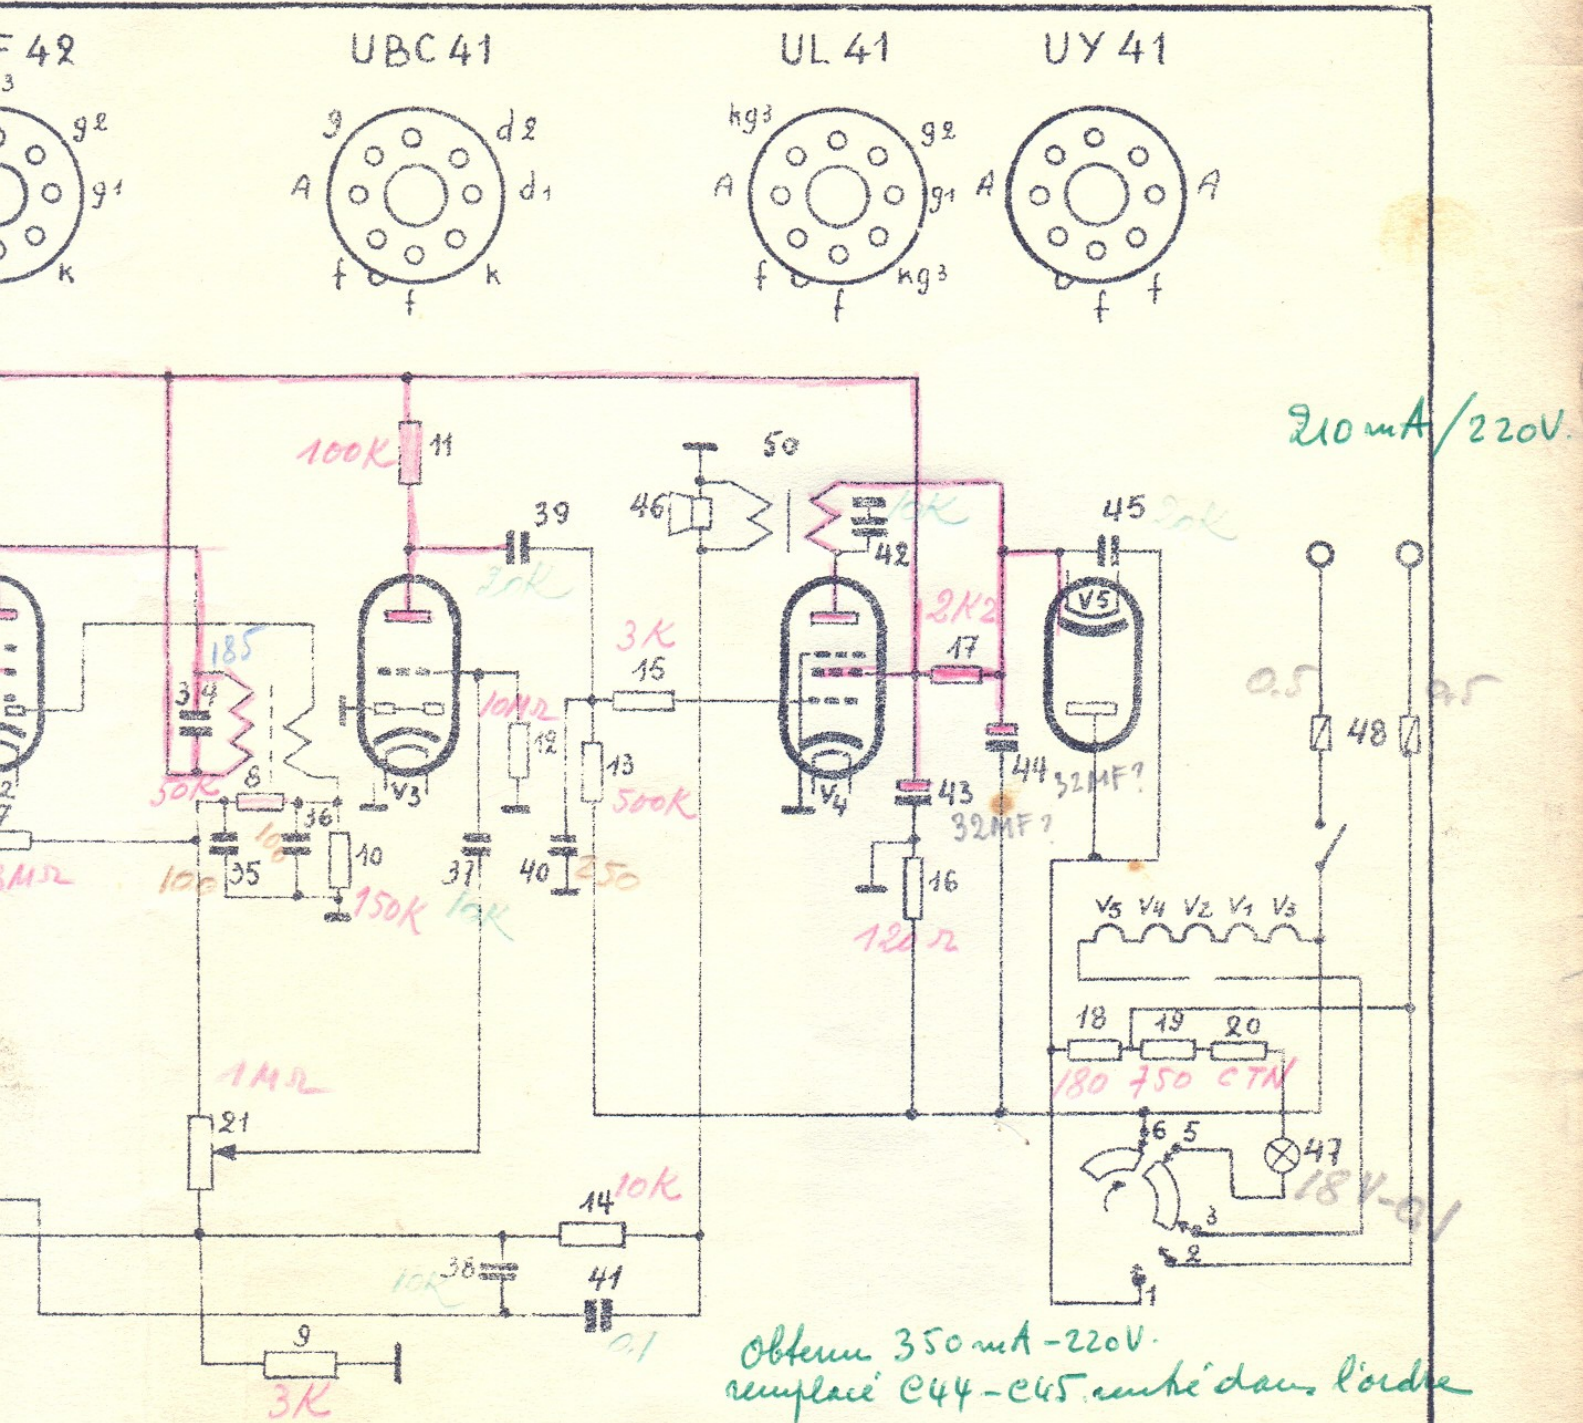

SCHEMA.E39U

26.9.52EB.

Vue du Bloc AO et
des divers réglages

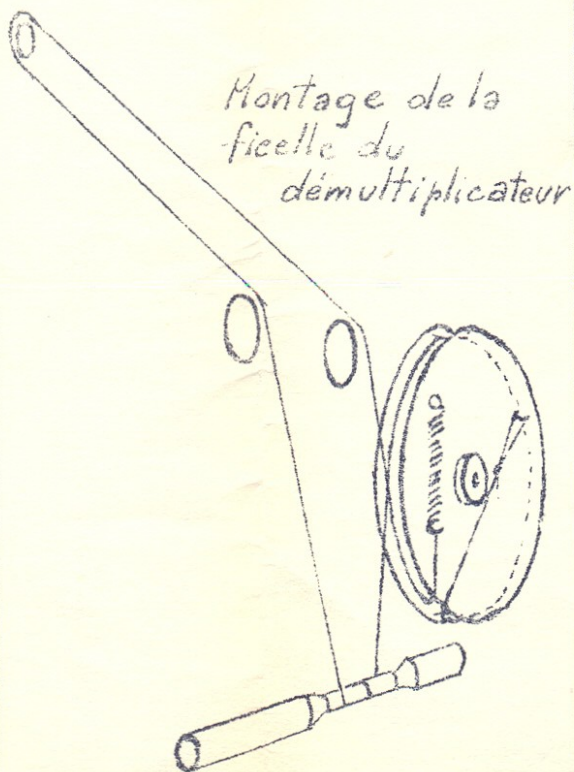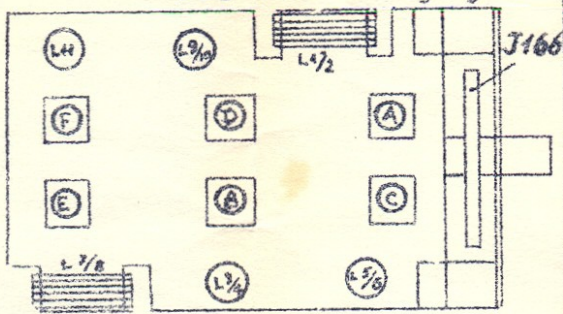

Montage de la
ficelle du
démultiplicateur

Résistances

1	20 K Ω
2	50 Ω
3	1 M Ω
4	50 K
5	100 Ω
6	10 K
7	3 M Ω
8	50 K
9	3 K
10	150 K
11	100 K
12	10 M Ω
13	500 K
14	10 K
15	3 K
16	120 Ω
17	2 K 2W
18	180 Ω
19	750 Ω
20	CTN
21	potent. 1M Ω

Condensateurs

a) Papier

22	1000 pF
----	---------

31	0,1 Mfd
33	0,05 Mfd
37	0,01 Mfd
38	0,01 Mfd
39	0,02 Mfd
41	0,1 Mfd
42	0,01 Mfd
45	0,02 Mfd

43-44 électrol 32

b) mica

26	300 pF
27	465 pF
30	185 pF
32	185 pF
34	185 pF
23	47 pF
25	47 pF
29	25 pF

c) Céramique

24	100 pF
40	250 pF
28	50 pF

NOM

NOVAR E39U

31 0,1 Mfd
 33 0,05 Mfd
 37 0,01 Mfd
 38 0,01 Mfd
 39 0,02 Mfd
 41 0,1 Mfd
 42 0,01 Mfd
 45 0,02 Mfd
 43-44 électrol 32 ufd 350V

49 250 pF
 35 100 pF
 36 100 pF
 46 HP ellipt
 47 ampoule 18V. 0,1A
 48 Fusibles 0,5A
 50 Transfo HP. 3000/3

b) mica

26 300 pF
 27 465 pF
 30 185 pF
 32 185 pF
 34 185 pF
 23 47 pF
 25 47 pF
 29 25 pF

c) Céramique

24 100 pF
 40 250 pF
 28 50 pF

le 30-9-52

NOMENCLATURE-E39U