

△ parts are safety assurance parts.

When replacing those parts, make sure to use the specified one.

P.C. Board Parts List (1)

△	REF. NO	PARTS NO.	PARTS NAME	REMARKS	QTY
	IC904	AN6555	I.C. (M)		1
	IC901	AN6557	I.C.		1
	IC101, IC201	BA6146	I.C. (M)	LEVEL METER	2
	IC502, IC503	BA6208A	I.C.		2
	IC902	HA12088NT	DOLBY IC		1
	IC903	LA2000S	I.C.		1
	IC905-IC907	M5218L	I.C.		4
	IC501	UPD7507HC-036	I.C. (M)		1
△	Q520	2SA564(R,S)	TRANSISTOR	TD-X401B	1
△	Q520, Q906	2SA564(R,S)TA	TRANSISTOR	TD-X401A/C/E/G/J/U	6
	Q908, Q910				
	Q911, Q913				
	Q902	2SA992(E,U)-T	TRANSISTOR		1
△	Q518	2SB772(Q,P)	SI. TRANSISTOR		1
△	Q102, Q104	2SC1685(R,S)TA	TRANSISTOR		18
	Q105, Q106				
	Q202, Q204				
	Q205, Q206				
	Q502 - Q505				
	Q519, Q521				
	Q903, Q907				
	Q909, Q912				
	Q101, Q201	2SC1845(E,U)-T	TRANSISTOR		3
	Q901				
	Q107, Q108	2SC2001(L,K)-T	TRANSISTOR		5
	Q207, Q208				
	Q501				
	Q904, Q905	2SC2785(E,F)-T	TRANSISTOR		2
△	Q516, Q517	2SD882(Q,P)	SI. TRANSISTOR		2
	Q103, Q203	2SK246(GR)E2	FET		2
△	D537	RD11E(B1)	Z DIODE	TD-X401B	1
△	D535	RD5.6E(B3)	Z. DIODE	TD-X401B	1
△	D554 - D556	SLV-31DC3F	L.E.D.		3
△	D553	SLV-31VC3F	L.E.D.		1
△	D501 - D505	1SS254T-77	SI. DIODE		25
	D508 - D514				
	D516 - D520				
	D536, D901				
	D902, D905				
	D906, D910				
	D911, D912				
△	D531 - D534	11E1-TB2	SI DIODE		4
	VR902	QVCA22W-V25	V. RESISTOR		1
	VR101, VR201	QVPA601-502	V. RESISTOR	PB. EQ	2
	VR103, VR203	QVP4A0B-104	V. RESISTOR	BIAS OSC	2
	VR901	QVZ5017-V03	V. RESISTOR		1
	CN903	QMV5004-005	CONNECTOR		2
	CN902	QMV5004-006	CONNECTOR	TD-X401G	2
	S902	QSL2310-101V	LEVER SWITCH	NR SYSTEM	1
	S901	QSL4310-013	LEVER SWITCH	TAPE SELECT	1
	S505 - S511	QSP1A11-V01	PUSH SWITCH		8
	S513				
△	S520	QST4101-V02	PUSH SWITCH		1
	L901	VQH1008-014	OSC COIL		1
	L104, L204	VQP0001-183S	INDUCTOR		2

REF. NO	PARTS NO.	PARTS NAME	REMARKS	QTY
L105 ,L205	VQP0001-332S	INDUCTOR		2
L103 ,L203	VQP0003-471	INDUCTOR		2
L102 ,L202	VQZ0013-001S	FILTER		2
L101 ,L201	VQZ0016-001	FILTER		2
RF103,RF203	QET41HR-474	E.CAPACITOR		2
R958	QRD129J-121	C RESISTOR		1
R501	QRD129J-6R8	C RESISTOR		1
R505	QRD144J-103S	CARBON RESISTOR		1
RF902	QRD144J-270S	C RESISTOR		1
R923	QRD149J-100S	CARBON RESISTOR		1
R959	QRD149J-151S	CARBON RESISTOR		1
R577	QRD149J-221S	CARBON RESISTOR		1
R957	QRD149J-390S	CARBON RESISTOR	TD-X401A/C/E/G/J/U	1
R506 ,R561	QRD149J-4R7S	C RESISTOR	TD-X401A/C/E/G/J/U	4
R562 ,R563				
R915 ,R916	QRD161J-100	CARBON RESISTOR	TD-X401B	3
R106 ,R127	QRD161J-101	CARBON RESISTOR		10
R143 ,R145				
R206 ,R227				
R243 ,R245				
R946 ,R951	QRD161J-102	CARBON RESISTOR		12
R109 ,R123				
R125 ,R135				
R209 ,R223				
R225 ,R235				
R569 ,R926	QRD161J-103	CARBON RESISTOR		44
R954 ,R969				
R128 ,R132				
R146 ,R147				
R153 ,R156				
R157 ,R232				
R246 ,R247				
R253 ,R256				
R257 ,R504				
R511 ,R515				
R531 ,R534				
R536 ,R537				
R570 ,R585				
R904 ,R911				
R917 -R920				
R927 ,R936				
R938 -R940				
R943 ,R944				
R947 ,R949				
R960 ,R964				
R965 ,R968	QRD161J-104	CARBON RESISTOR		14
R102 ,R118				
R119 ,R133				
R152 ,R202				
R218 ,R219				
R233 ,R252	QRD161J-105	CARBON RESISTOR		8
R533 ,R535				
R937 ,R956				
R107 ,R148				
R162 ,R207				

When replacing those parts, make sure to use the specified one.
 △ parts are safety assurance parts.

△	REF. NO	PARTS NO.	PARTS NAME	REMARKS	QTY
	R121 ,R169				
	R208 ,R210				
	R211 ,R212				
	R221 ,R269				
	R528 ,R529				
	R903 ,R922				
	R948 ,R963				
	R158 ,R163	QRD161J-473	CARBON RESISTOR		5
	R258 ,R263				
	R522				
	R104 ,R204	QRD161J-512	CARBON RESISTOR		2
	R130 ,R230	QRD161J-562	CARBON RESISTOR		2
	R105 ,R205	QRD161J-682	CARBON RESISTOR		2
	R126 ,R164	QRD161J-683	CARBON RESISTOR		4
	R226 ,R264				
	R122 ,R222	QRD161J-822	CARBON RESISTOR		2
	R168 ,R268	QRD161J-823	CARBON RESISTOR		2
△	R957	QRZ0052-390	C RESISTOR	TD-X401B	1
△	R506 ,R561	QRZ0052-4R7	F.RESISTOR	TD-X401B	4
	R562 ,R563				
	RN501 ,RN502	VCR0003-003	C.R.BLOCK		2
	CF501	EFO-A4ROM02A2	CERA LOCK		1
	C509 ,C511	QCF11HP-103	C CAPACITOR		13
	C512 ,C531				
	C532 ,C903				
	C904 ,C931				
	C932 ,C938				
	C939				
	C906 ,C940	QCF11HP-473	C.CAPACITOR		2
	C102 ,C136	QCS11HJ-151	C.CAPACITOR		6
	C144 ,C202				
	C236 ,C244				
	C132 ,C232	QCS11HJ-221	C.CAPACITOR		2
	C156 ,C256	QCS11HJ-271	C.CAPACITOR		2
	C507 ,C508	QCS11HJ-330	C.CAPACITOR		2
	C151 ,C251	QCS11HJ-471	C.CAPACITOR		2
	C134 ,C141	QCS11HJ-561	C.CAPACITOR		4
	C234 ,C241				
	C101 ,C201	QCS11HJ-681	C.CAPACITOR		2
	C133 ,C233	QCS12HJ-151V	C CAPACITOR		2
	C108 ,C119	QEN41EM-475	NP.E.CAPACITOR		6
	C129 ,C208				
	C219 ,C229				
	C901 ,C907	QETC1AM-477ZM	E.CAPACITOR		3
	C908				
	C104 ,C204	QET41AR-107	E.CAPACITOR		11
	C502 ,C510				
	C539 ,C541				
	C544 ,C929				
	C930 ,C936				
	C537 ,C538	QET41CR-107	E CAPACITOR		3
	C542				
	CF901	QET41CR-227	E.CAPACITOR		1
	C935	QET41ER-106	E CAPACITOR		1
	C536	QET41ER-108	E CAPACITOR		1

P.C. Board Parts List (2)


REF. NO	PARTS NO.	PARTS NAME	REMARKS	QTY
R248 ,R262				
R137 ,R237	QRD161J-121	CARBON RESISTOR		2
RF102 ,RF202	QRD161J-123	CARBON RESISTOR		2
R165 -R167	QRD161J-124	CARBON RESISTOR		6
R265 -R267				
R154 ,R254	QRD161J-151	CARBON RESISTOR		4
R503 ,R953				
R101 ,R201	QRD161J-152	CARBON RESISTOR		5
R518 ,R932				
R934				
RF104 ,RF204	QRD161J-153	CARBON RESISTOR		14
R113 ,R141				
R144 ,R170				
R172 ,R213				
R241 ,R244				
R270 ,R272				
R134 ,R234	QRD161J-183	CARBON RESISTOR		2
R155 ,R255	QRD161J-184	CARBON RESISTOR		2
RF903 ,R906	QRD161J-221	CARBON RESISTOR		2
R120 ,R171	QRD161J-222	CARBON RESISTOR		7
R220 ,R271				
R530 ,R907				
R909				
RF101 ,RF201	QRD161J-223	CARBON RESISTOR		25
R136 ,R141				
R236 ,R241				
R514 ,R521				
R523 ,R559				
R905 ,R912				
R921 ,R950				
R966				
RF103 ,RF203	QRD161J-273	CARBON RESISTOR		4
R924 ,R925				
R124 ,R142	QRD161J-332	CARBON RESISTOR	TD-X401G	18
R151 ,R161				
R173 ,R224				
R242 ,R251				
R261 ,R273				
R574 ,R902				
R908 ,R928				
R931 ,R955				
R160 ,R260	QRD161J-333	CARBON RESISTOR		2
R539 -R542	QRD161J-391	CARBON RESISTOR		5
R967				
R572	QRD161J-392	CARBON RESISTOR		1
R149 ,R249	QRD161J-393	CARBON RESISTOR		4
R103 ,R203	QRD161J-394	CARBON RESISTOR		3
R941				
RF901 ,R502	QRD161J-471	CARBON RESISTOR		13
R565 -R568				
R579 ,R901				
R929 ,R930				
R970 ,R971				
R108 ,R110	QRD161J-472	CARBON RESISTOR		18
R111 ,R112				

P.C. Board Parts List (3)

REF. NO	PARTS NO.	PARTS NAME	REMARKS	QTY
CF102,CF202	QET41ER-226	E.CAPACITOR		2
C535	QET41ER-228	E.CAPACITOR		1
C934	QET41ER-336	E CAPACITOR		1
C913	QET41ER-476	E.CAPACITOR		1
CF101,CF201	QET41HR-104	E CAPACITOR		2
C142 ,C143	QET41HR-105	E.CAPACITOR		13
C158 ,C242				
C243 ,C258				
C504 ,C505				
C902 ,C909				
C937				
C137 ,C157	QET41HR-224	E.CAPACITOR		7
C237 ,C257				
C924				
C105 ,C205	QET41HR-475	E.CAPACITOR		2
C543	QET51AR-109N	E.CAPACITOR		1
C122 ,C127	QET51HR-684N	E CAPACITOR		4
C222 ,C227				
C123 ,C128	QET61HR-225ZM	E.CAPACITOR		6
C135 ,C223				
C228 ,C235				
C152 ,C154	QFN41HJ-102	M.CAPACITOR		4
C252 ,C254				
C109 ,C110	QFN41HJ-152	M.CAPACITOR		6
C155 ,C209				
C210 ,C255				
C139 ,C239	QFN41HJ-222	M.CAPACITOR		4
C915 ,C916				
C914	QFN41HJ-332	M.CAPACITOR		1
C106 ,C206	QFN41HJ-562	M.CAPACITOR		2
C911	QFP82AJ-822	PP CAPACITOR		1
C103 ,C120	QFV41HJ-103	TF.CAPACITOR		9
C125 ,C203				
C220 ,C225				
C920 -C922				
C121 ,C124	QFV41HJ-183	TF.CAPACITOR		6
C138 ,C221				
C224 ,C238				
C912	QFV41HJ-223	TF.CAPACITOR		1
C923	QFV41HJ-224	TF.CAPACITOR		1
C126 ,C226	QFV41HJ-823	TF CAPACITOR		2
C918	QFV71HJ-123ZM	T.F.CAPACITOR		1
C919	QFV71HJ-153ZM	T.F.CAPACIROR		1
CP901	QMV5005-008	CONNECTOR		1
J901	EMN00TV-402A	PIN JACK		1
J903	QMC9014-008	DIN SOCKET	TD-X401G	1
J501	QMS3533-001	JACK	DCS JACK	1
J101 ,J201	QMS6L10-010	MIC JACK		2
J902	QMS6302-122	JACK		1
FL2	BG-112Z	FL TUBE		1

REF.	PARTS NO.	PARTS NAME	REMARKS	QTY
69	VMH4011-002	HEAT SINK	Q516,517,518	1
70	DPSP3008Z	SCREW	REG.TRANSISTOR	3
C937	QET41HR-105	E.CAPACITOR		1
D910	1SS254T-77	SI.DIODE		1
J501	QMS3533-001	JACK	DCS JACK	1
J903	QMC9014-008	DIN SOCKET	TD-X401V	1
	QMC9014-008	DIN SOCKET	TD-X401G	1
R506	QRD149J-4R7S	C RESISTOR	TD-X401A/C/E/G/J/U	1
	QRZ0052-4R7	F.RESISTOR	TD-X401B	1
R561	QRD149J-4R7S	C RESISTOR	TD-X401A/C/E/G/J/U	1
	QRZ0052-4R7	F.RESISTOR	TD-X401B	1
R562	QRD149J-4R7S	C RESISTOR	TD-X401A/C/E/G/J/U	1
	QRZ0052-4R7	F.RESISTOR	TD-X401B	1
R563	QRD149J-4R7S	C RESISTOR	TD-X401A/C/E/G/J/U	1
	QRZ0052-4R7	F.RESISTOR	TD-X401B	1
R915	QRD161J-100	CARBON RESISTOR	TD-X401B	1
S1	QSS2325-208	SLIDE SWITCH	TD-X401U	1
S520	QST4101-V02	PUSH SWITCH		1
S901	QSL4310-013	LEVER SWITCH	TAPE SELECT	1
S902	QSL2310-101V	LEVER SWITCH	NR SYSTEM	1
VR101,201	QVPA601-502	V.RESISTOR	PB.EQ	2
VR103,203	QVP4A0B-104	V.RESISTOR	BIAS OSC	2
VR901	QVZ5017-V03	V.RESISTOR	INPUT LEVEL	1

Exploded View of Enclosure Assembly and

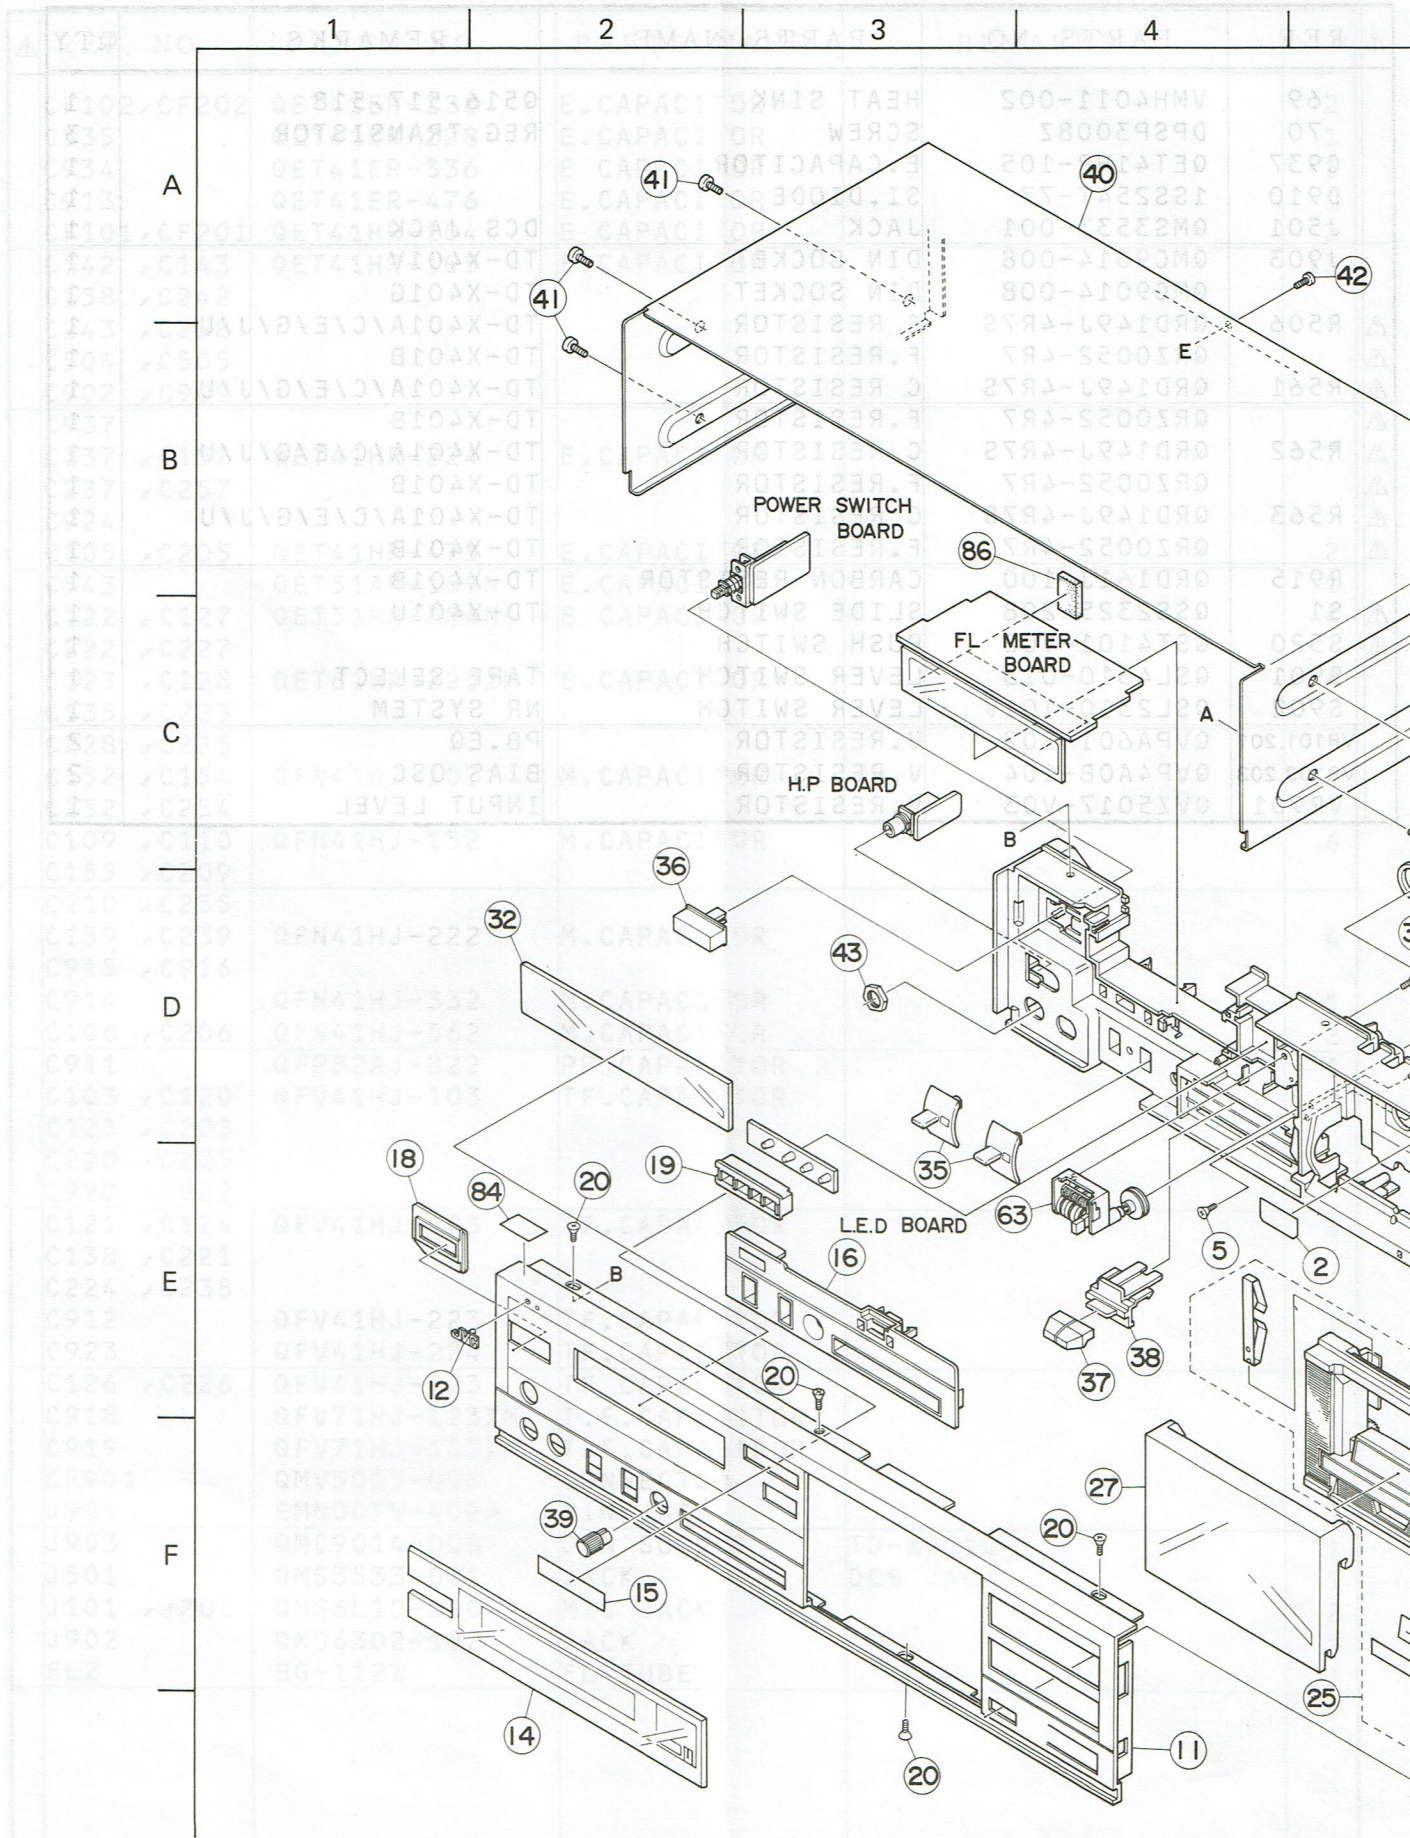

Enclosure Assembly and Parts List

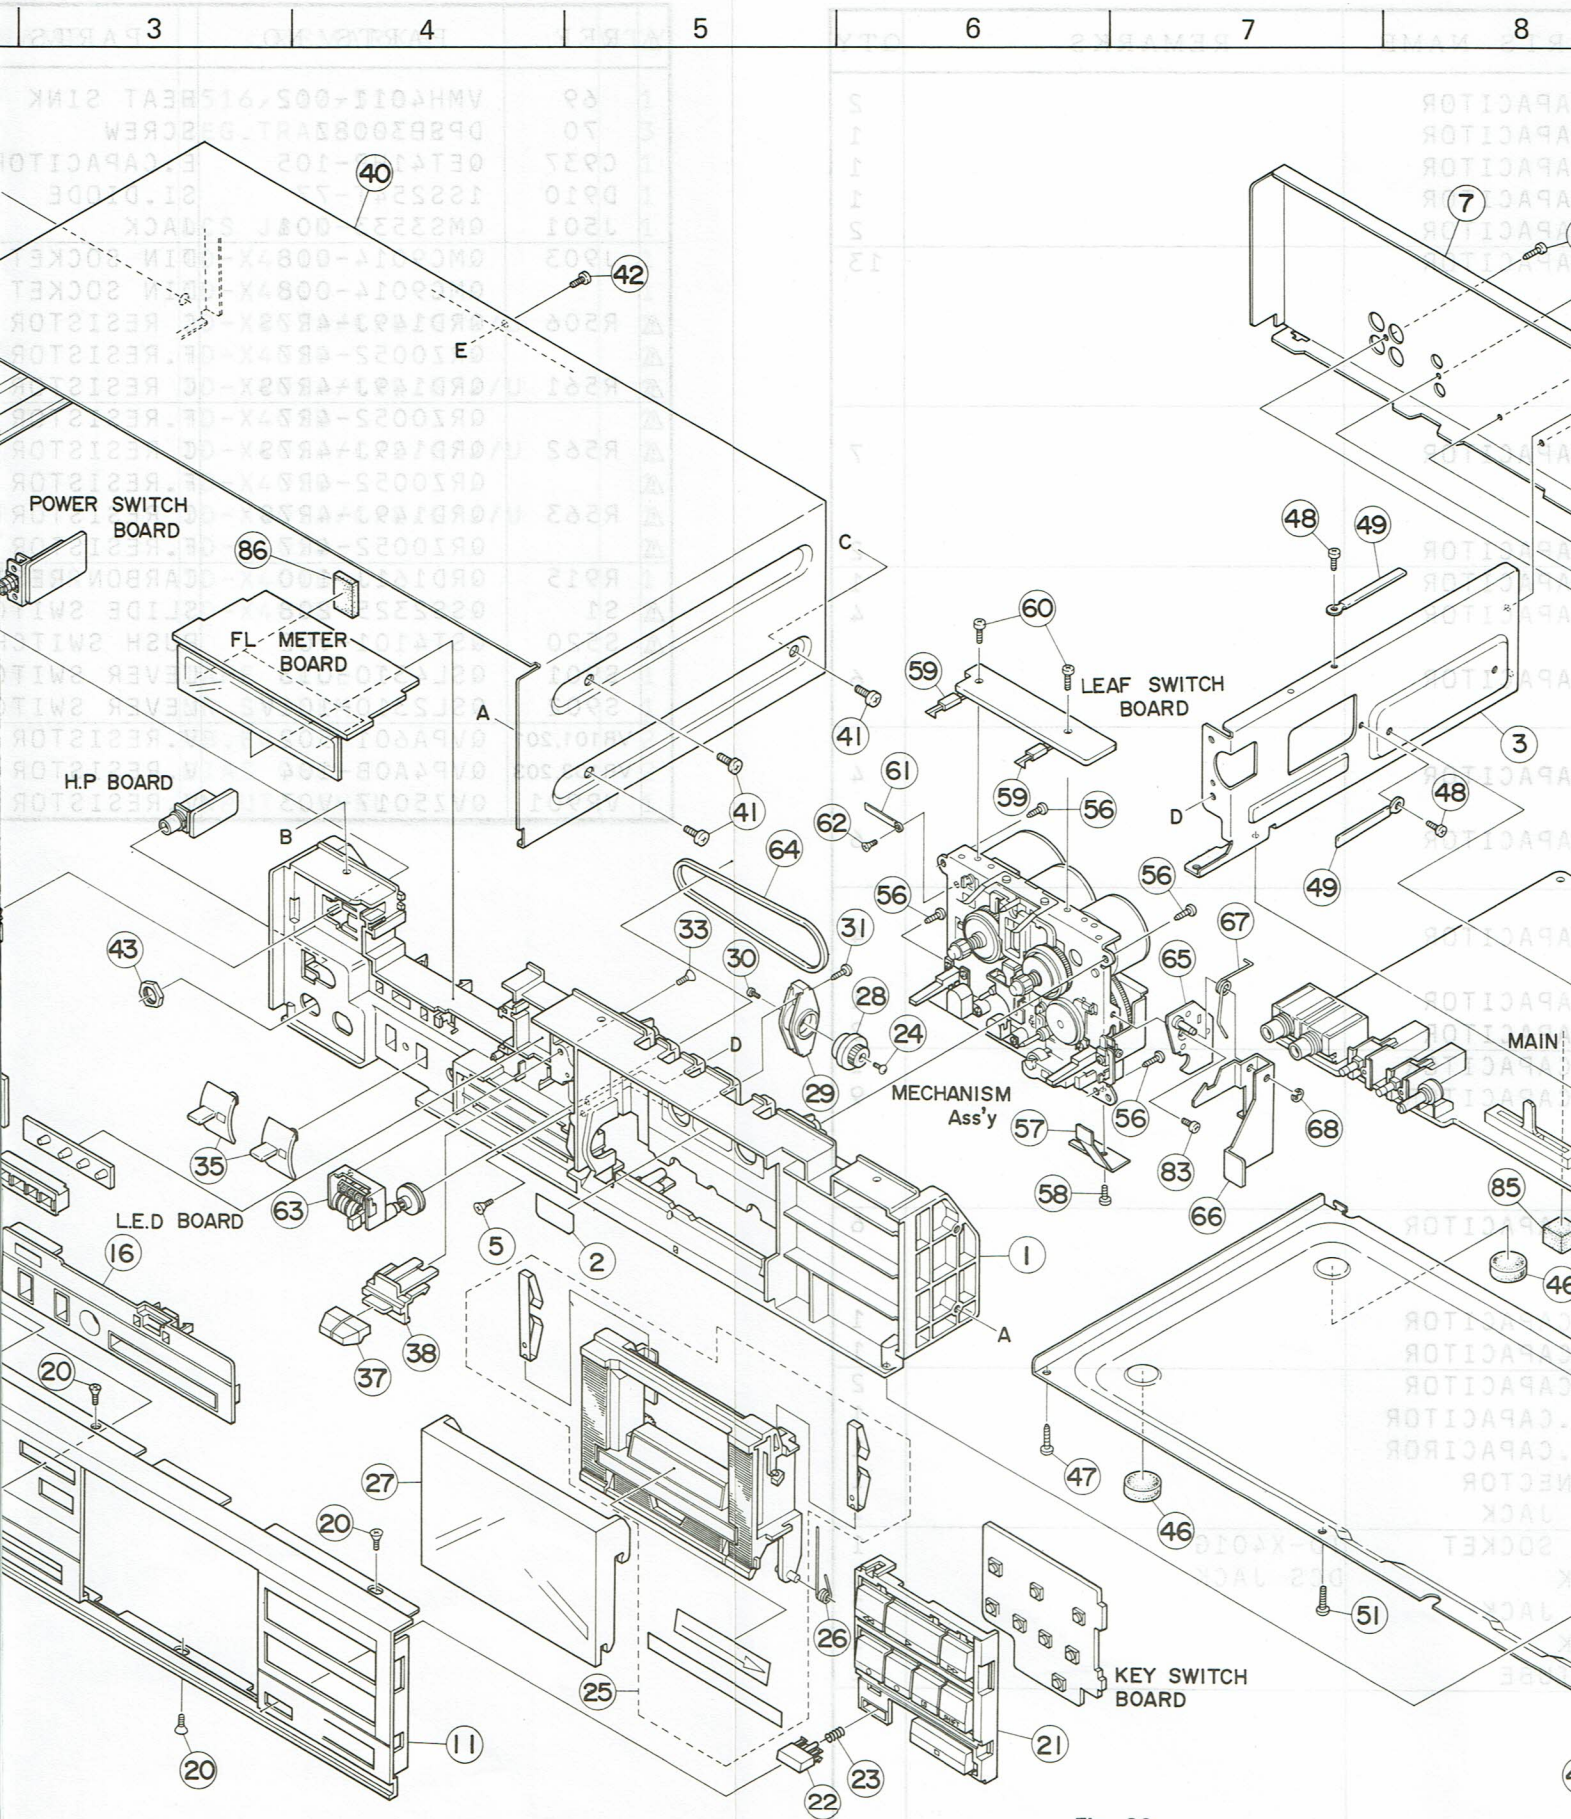


Fig. 20

Parts List

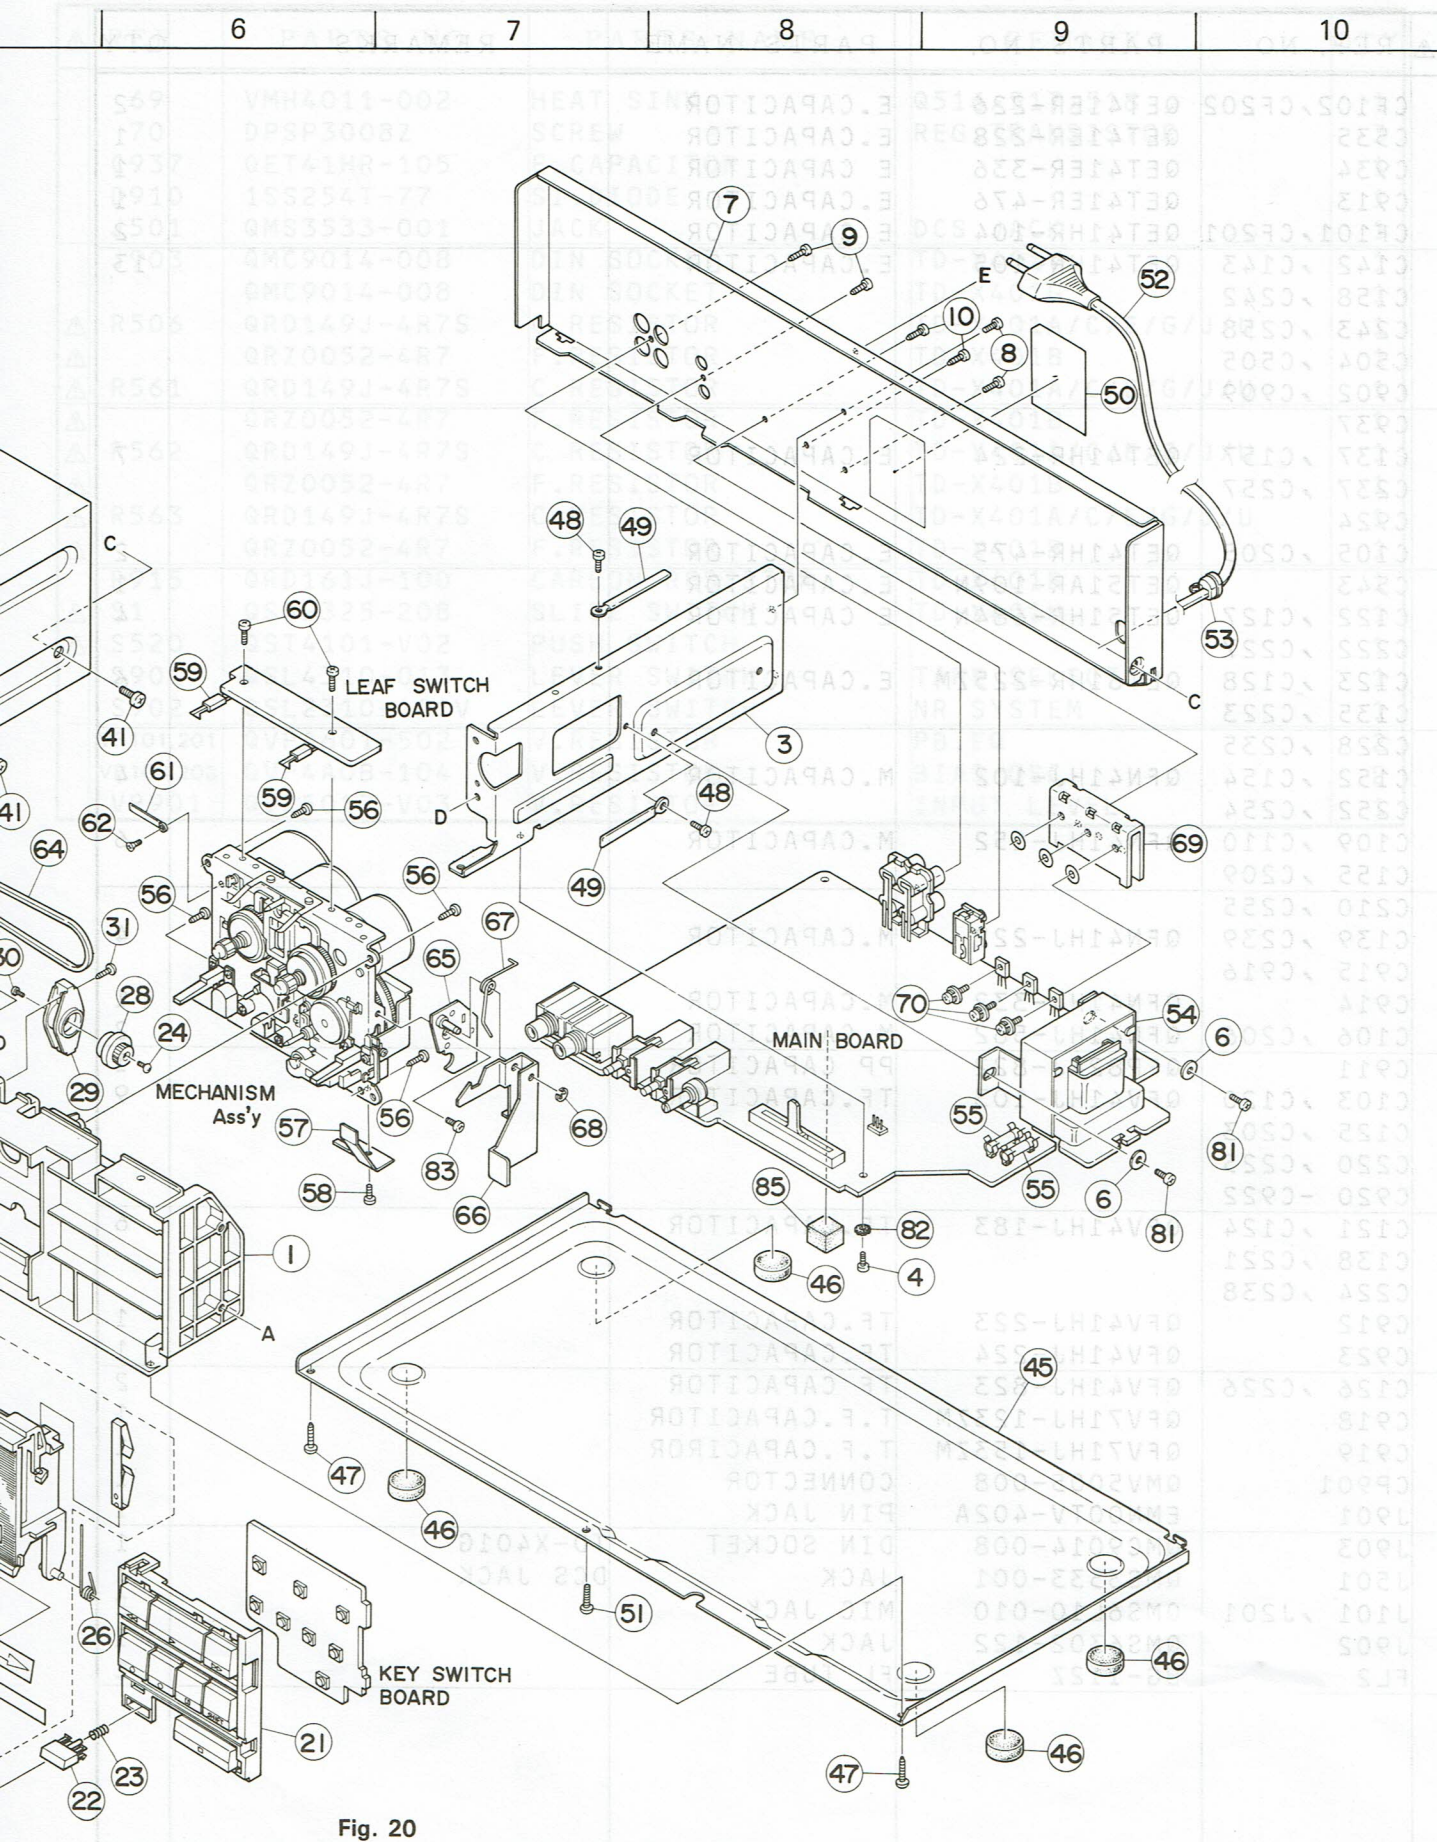


Fig. 20

Enclosure Assembly Parts List


△ parts are safety assurance parts.

When replacing those parts, make sure to use the specified one.

△ REF.	PARTS NO.	PARTS NAME	REMARKS	QTY
1	VJC1520-001	FRONT PANEL		1
2	VJD4005-002	REFLECTION PLAT		1
3	VKL3743-001	CENTER CHASSIS		1
4	SDST3006Z	SCREW	P.C.B	1
5	SSST3008Z	SCREW	FRONT PANEL	1
6	Q03091-105	WASHER	TD-X401B P.TRANS	2
7	VJC2173-008	REAR PANEL	TD-X401A/B/C/E/J	1
	VJC2173-009	REAR PANEL	TD-X401U	1
	VJC2173-010	REAR PANEL	TD-X401G	1
8	SDST3006N	SCREW	R.PANEL+C.CHASSIS	2
9	SDSF3008N	SCREW	PIN JACK+DCS	2
10	SDSF3008N	SCREW	HEAT SINK	2
11~19	ZCTDX401-FBK	FRONT PLATE ASS'Y		1
11	VJC1521-002	FRONT PLATE		1
12	E72968-001	MARK		1
14	VJK3340-002	FINDER		1
15	VYTT437-002	SHEET		0.05
16	VJD3591-001	ESCUTCHEON		1
18	VJD4987-001	ESCUTCHEON		1
19	VJD4992-001	HOLDER		1
20	SSSF3008Z	SCREW	F.PANEL+F.PLATE	4
21	VXP2003-002	PUSH BUTTON	MECHA	1
22	VXP4349-00A	PUSH BUTTON	EJECT	1
23	VKW3001-063	COMP.SPRING		1
24	SBSB2004Z	SCREW		1
25~26	ZCTDX401-CH	CASSETTE HOLDER ASS'Y		1
25-1	VJT2129-002	CASSETTE HOLDER		1
25-2	VJD4988-002	PLATE		1
25-3	VJD4993-002	PLATE		1
25-4	VKY4382-009	SPRING		1
25-5	VKY4382-010	SPRING		1
26	VKW3006-091	SPRING	C.HOLDER	1
27	VJT3182-001	LID		1
28	VYH5133-002	GEAR		1
29	VYH5134-002	DAMPER HOLDER		1
30	SPSK1720M	SCREW		1
31	SBSF2608Z	SCREW		1
32	VJD4615-011	FILTER	FL METER	1
33	SBSF2606Z	SCREW	TAPE COUNTER	1
35	VXQ4074-003	KNOB	NR&TAPE SELECT	2
36	E72789-001	POWER KNOB	POWER	1
37	VXS3017-001	SLIDE KNOB	INPUT	1
38	VKS4783-002	SLIDE LEVER		1
39	VXL4276-001	KNOB	BALANCE	1
40	VJC2172-002	TOP COVER		1
41	SDSB4010M	SCREW	TOP COVER	6
42	SDST3006N	SCREW	TOP COVER	1
43	VKZ4150-001	SPECIAL NUT		1
45	VKL2235-002	BOTTOM COVER		1
46	VJF4003-005	FOOT		4
47	SBSF3008Z	SCREW	BOTTOM COVER	2
48	SDST3006Z	SCREW	WIRE HOLDER	2
49	VKZ4001-011	WIRE HOLDER		2
50	VYN2172-002PA	NAME PLATE	TD-X401B	1
	VYN2172-003PA	NAME PLATE	TD-X401A	1

△	REF.	PARTS NO.	PARTS NAME	REMARKS	QTY
		VYN2172-005PA	NAME PLATE	TD-X401E	1
		VYN2172-006PA	NAME PLATE	TD-X401J	1
		VYN2172-007PA	NAME PLATE	TD-X401U	1
		VYN2172-008PA	NAME PLATE	TD-X401G	1
	51	SDST3012Z	SCREW	BOTTOM COVER	1
△	52	QMP1200-200	POWER CORD	TD-X401C	1
△		QMP1200-200	POWER CORD	TD-X401J	1
△		QMP2560-200	POWER CORD	TD-X401A	1
△		QMP3900-200	POWER CORD	TD-X401E	1
△		QMP3900-200	POWER CORD	TD-X401G	1
△		QMP3900-200	POWER CORD	TD-X401U	1
△		QMP9017-008BS	AC CORD	TD-X401B	1
△	53	QHS3876-162	S.R.BUSHING	TD-X401A	1
△		QHS3876-162	S.R.BUSHING	TD-X401C	1
△		QHS3876-162	S.R.BUSHING	TD-X401E	1
△		QHS3876-162	S.R.BUSHING	TD-X401G	1
△		QHS3876-162	S.R.BUSHING	TD-X401J	1
△		QHS3876-162	S.R.BUSHING	TD-X401U	1
△		QHS3876-162BS	S.R.BUSHING	TD-X401B	1
△	54	VTP54A5-071BN	POWER TRANS	TD-X401C	1
△		VTP54A5-071BN	POWER TRANS	TD-X401J	1
△		VTP54G5-011BN	POWER TRANS	TD-X401U	1
△		VTP54M5-011BN	POWER TRANS	TD-X401G	1
△		VTP54M5-011BN	POWER TRANS	TD-X401E	1
△		VTP54M5-011BN	POWER TRANS	TD-X401A	1
△	55	VTP54M5-011BNBS	POWER TRANS	TD-X401B	1
△		QMF51A2-R125	FUSE	F3 TD-X401U	1
△		QMF51A2-R80	FUSE	F1,F2 TD-X401G	2
△		QMF51A2-R80	FUSE	F1,F2 TD-X401E	2
△		QMF51A2-R80	FUSE	F1,F2 TD-X401E	2
△		QMF51A2-R80	FUSE	F1,F2 TD-X401A	2
	56	QMF51E2-R80BS	FUSE	F1,F2 TD-X401B	2
		SSSF3010Z	SCREW	MECHA+F.PANEL	4
	57	VKY4296-001	SPRING	MECHA	1
	58	SDST2603Z	SCREW	SPRING	1
	59	VSH1140-002	LEAF SWITCH		2
	60	SDST2608Z	SCREW	LEAF SW P.C.B.	2
	61	VKZ4001-009	WIRE HOLDER		1
	62	SSSP2603Z	SCREW		1
	63	VKC5189-001T	COUNTER		1
	64	VKB3000-063	COUNTER BELT(R)		1
	65	VKL5919-00C	BRACKET		1
	66	VKL3751-001	EJECT LEVER		1
	67	VKW4613-001	SPRING		1
	68	REE2500	E.RING		1
	69	VMH4011-002	HEAT SINK	Q516,517,518	1
	70	DPSP3008Z	SCREW	REG.TRANSISTOR	3
	71	VND4003-046	FUSE LABEL		1
	72	E48729-002	RIVET	TD-X401G DIN JACK	2
	73	SDSP3008N	SCREW	TD-X401U V.SELECT	2
	81	SDST3008Z	SCREW	POWER TRANS	2
	82	WBS3000N	WASHER	MAIN P.C.B.	1
	83	SDST2606Z	SCREW	EJECT LEVER ASS,Y	1
	84	VND4006-017	CAUTION LABEL		1
	85	VYSH115-004	SPACER	MAIN P.C.B.	1
	86	VYSH104-022	SPACER	FL METER	2

Exploded View of Mechanism Assembly and

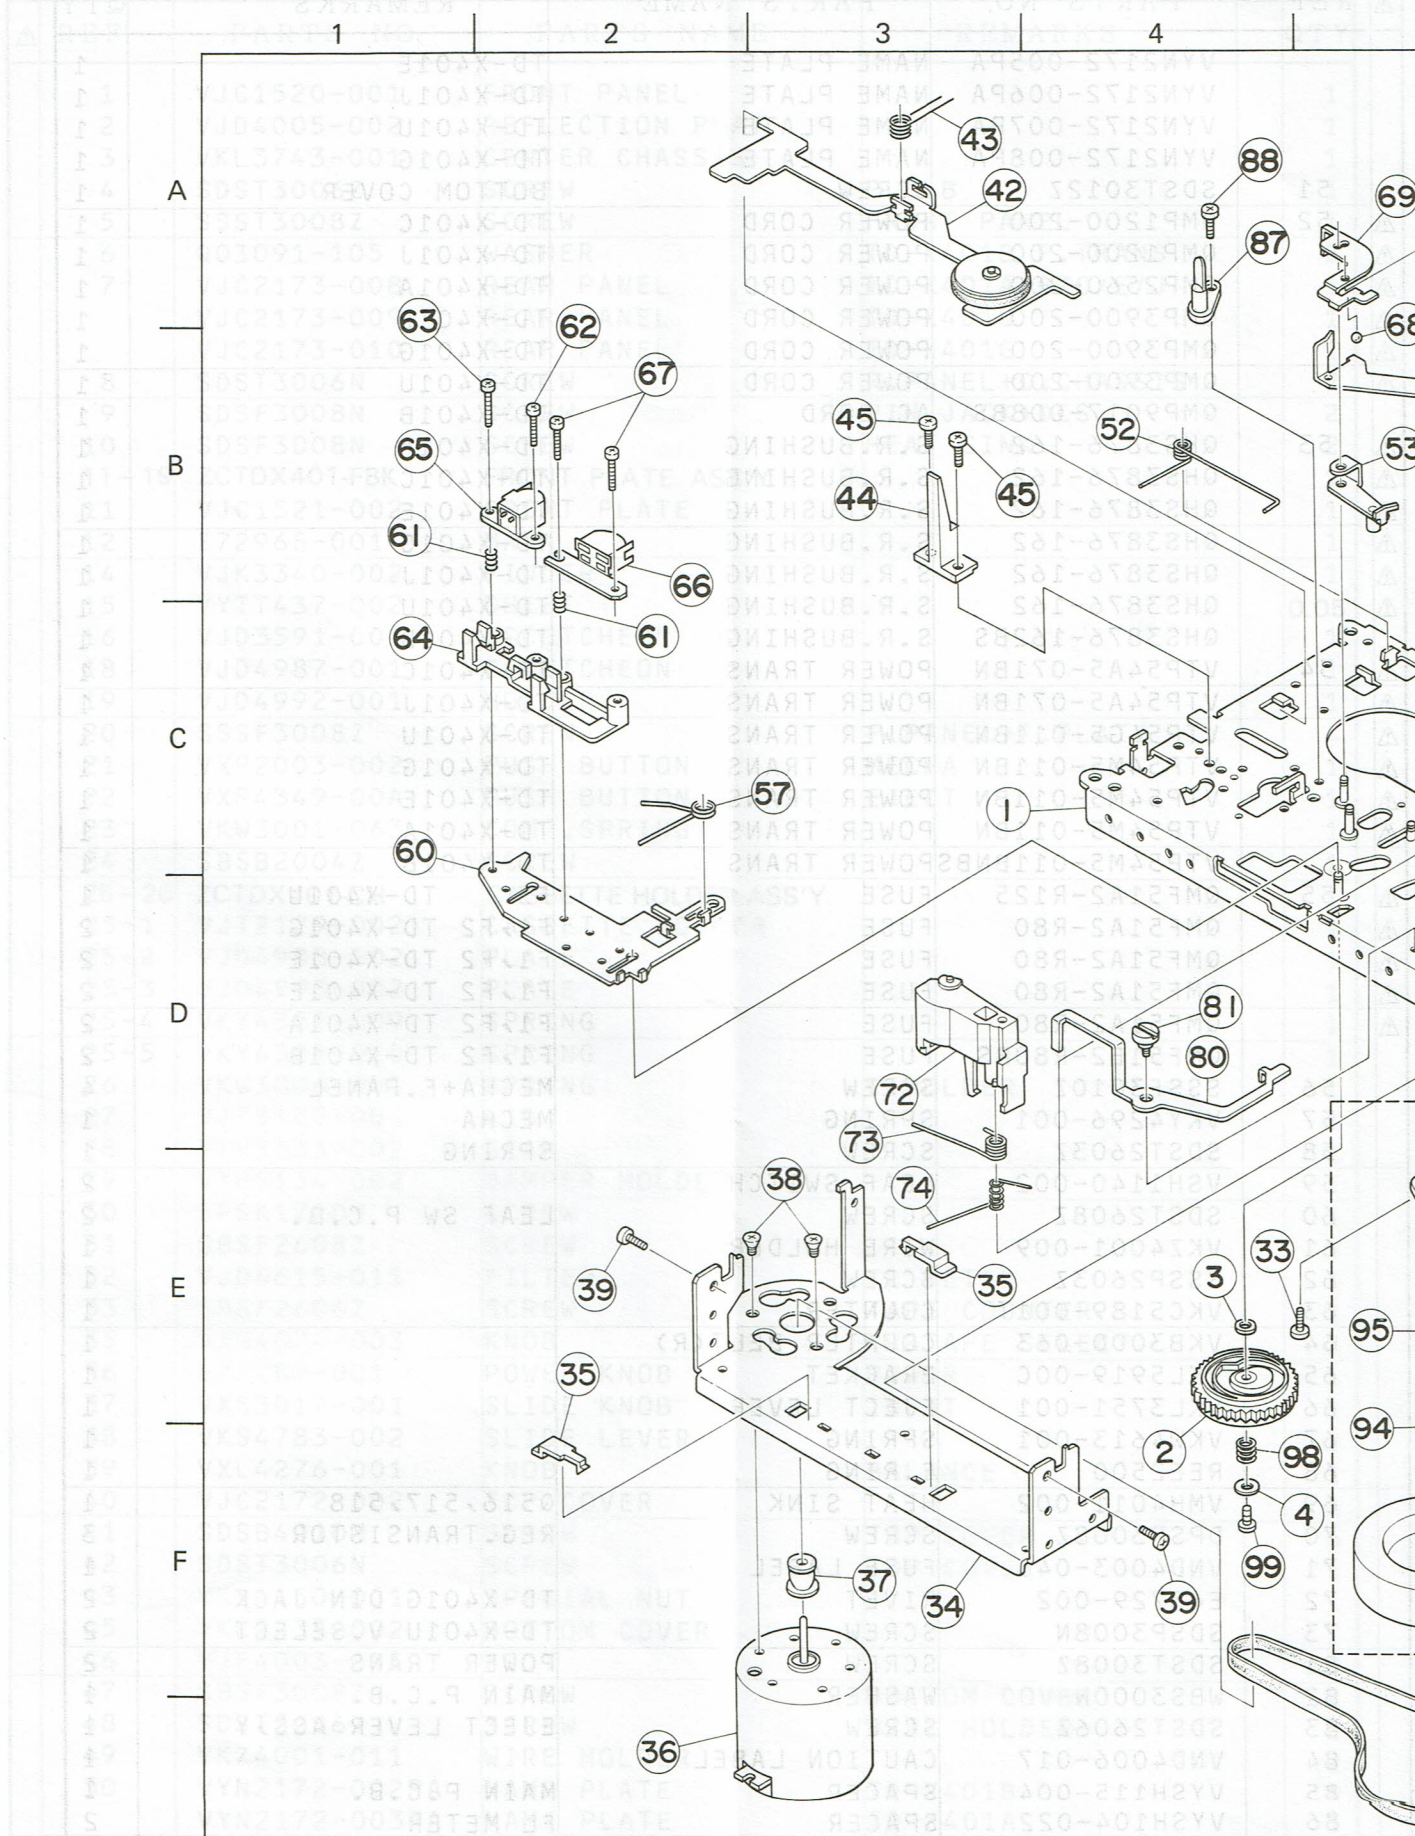

Mechanism Assembly and Parts List

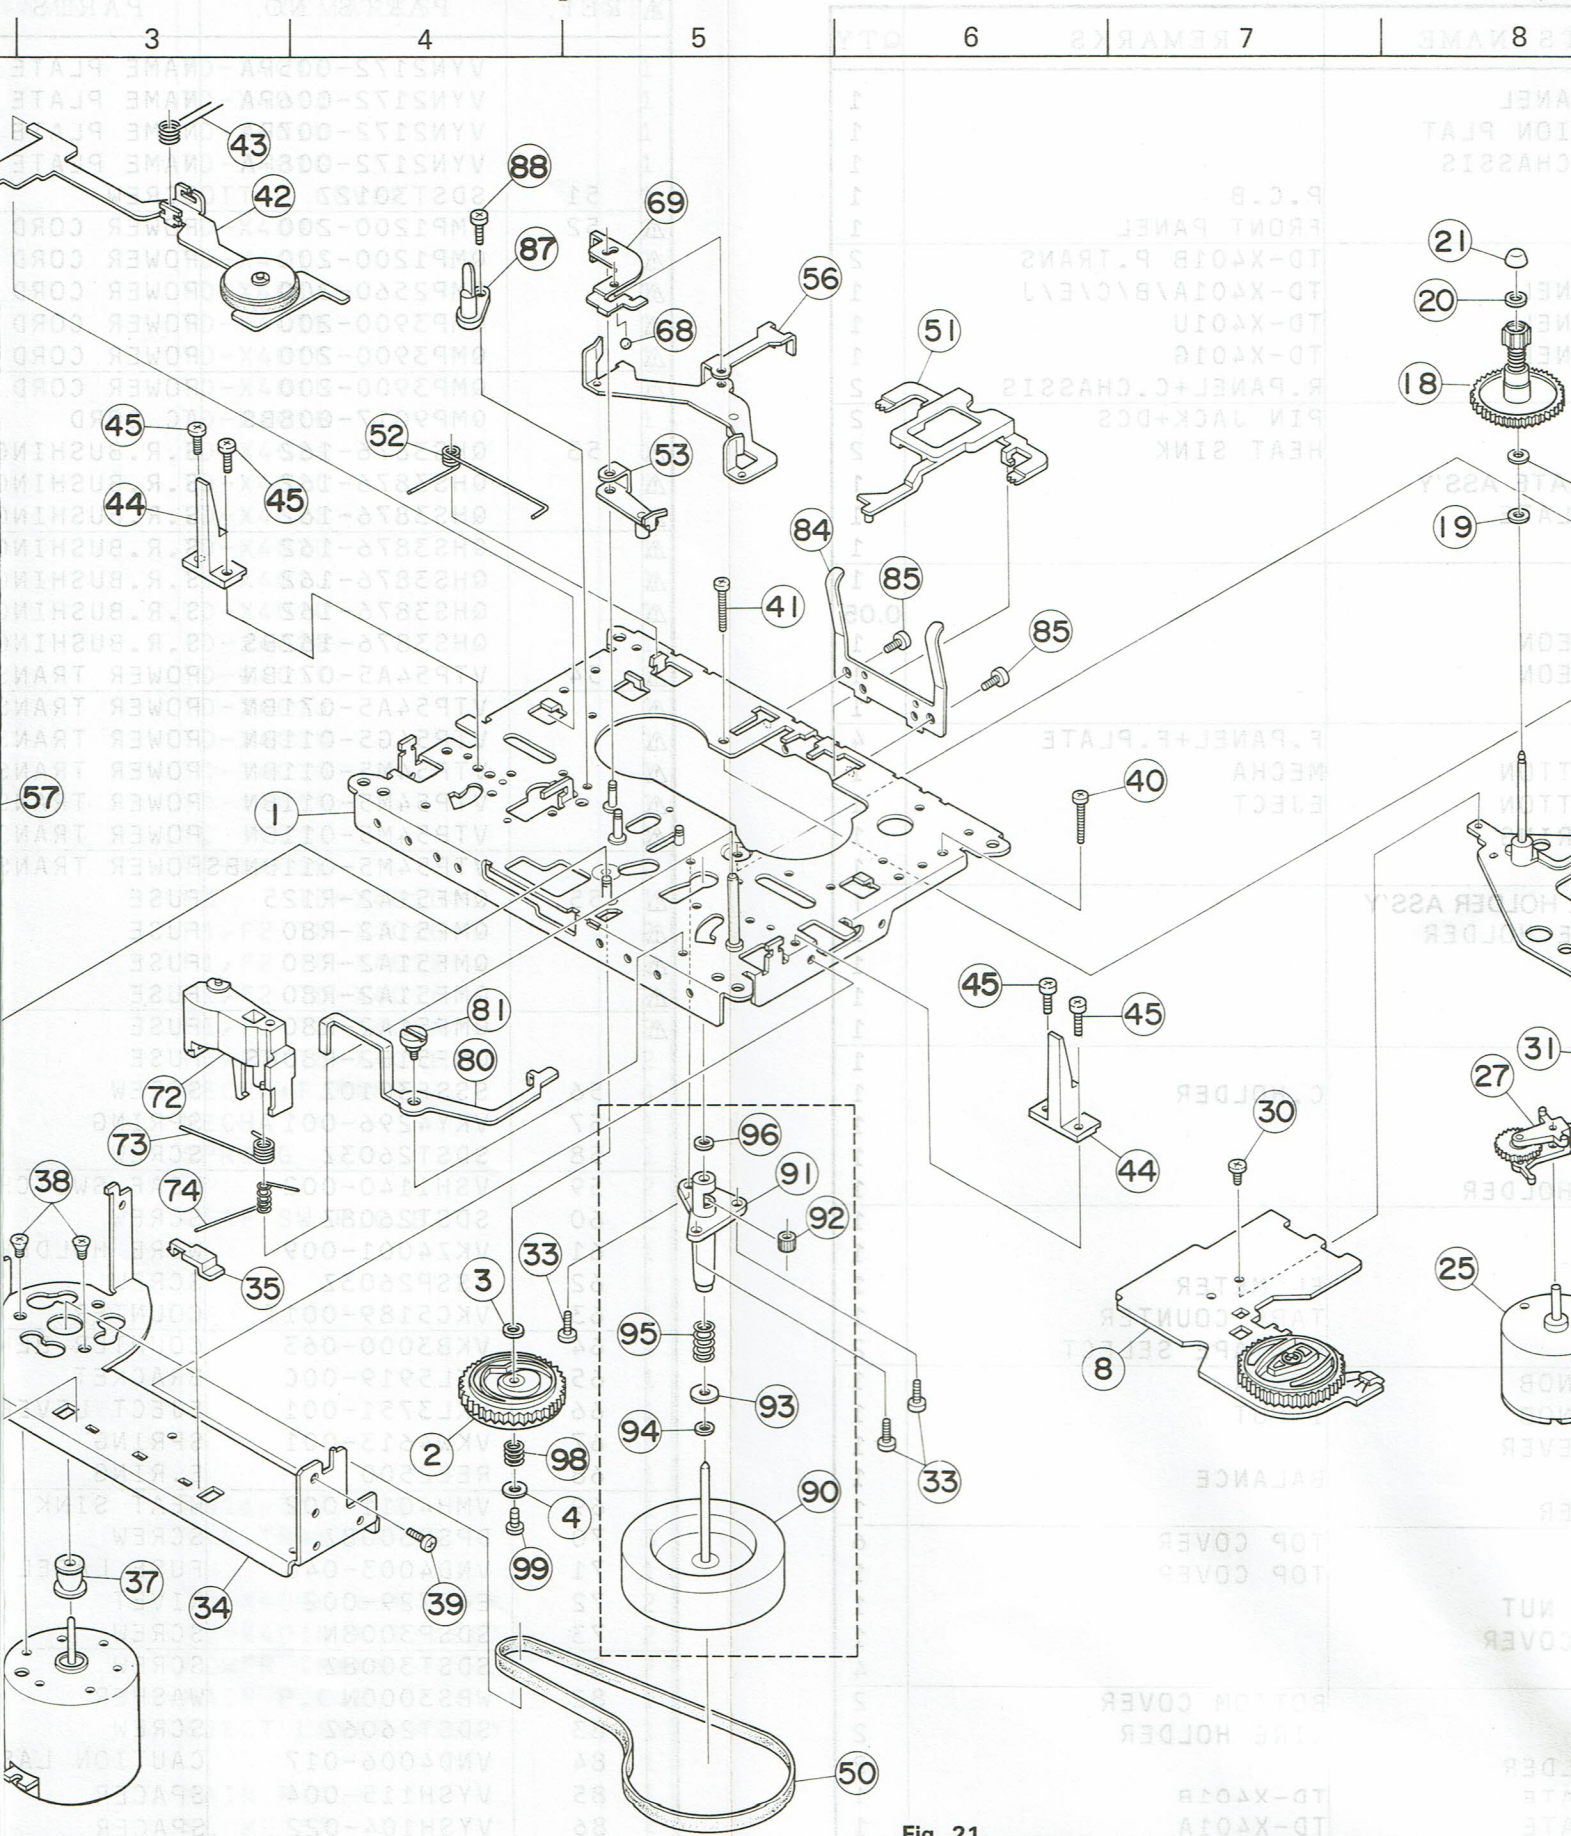


Fig. 21

Parts List

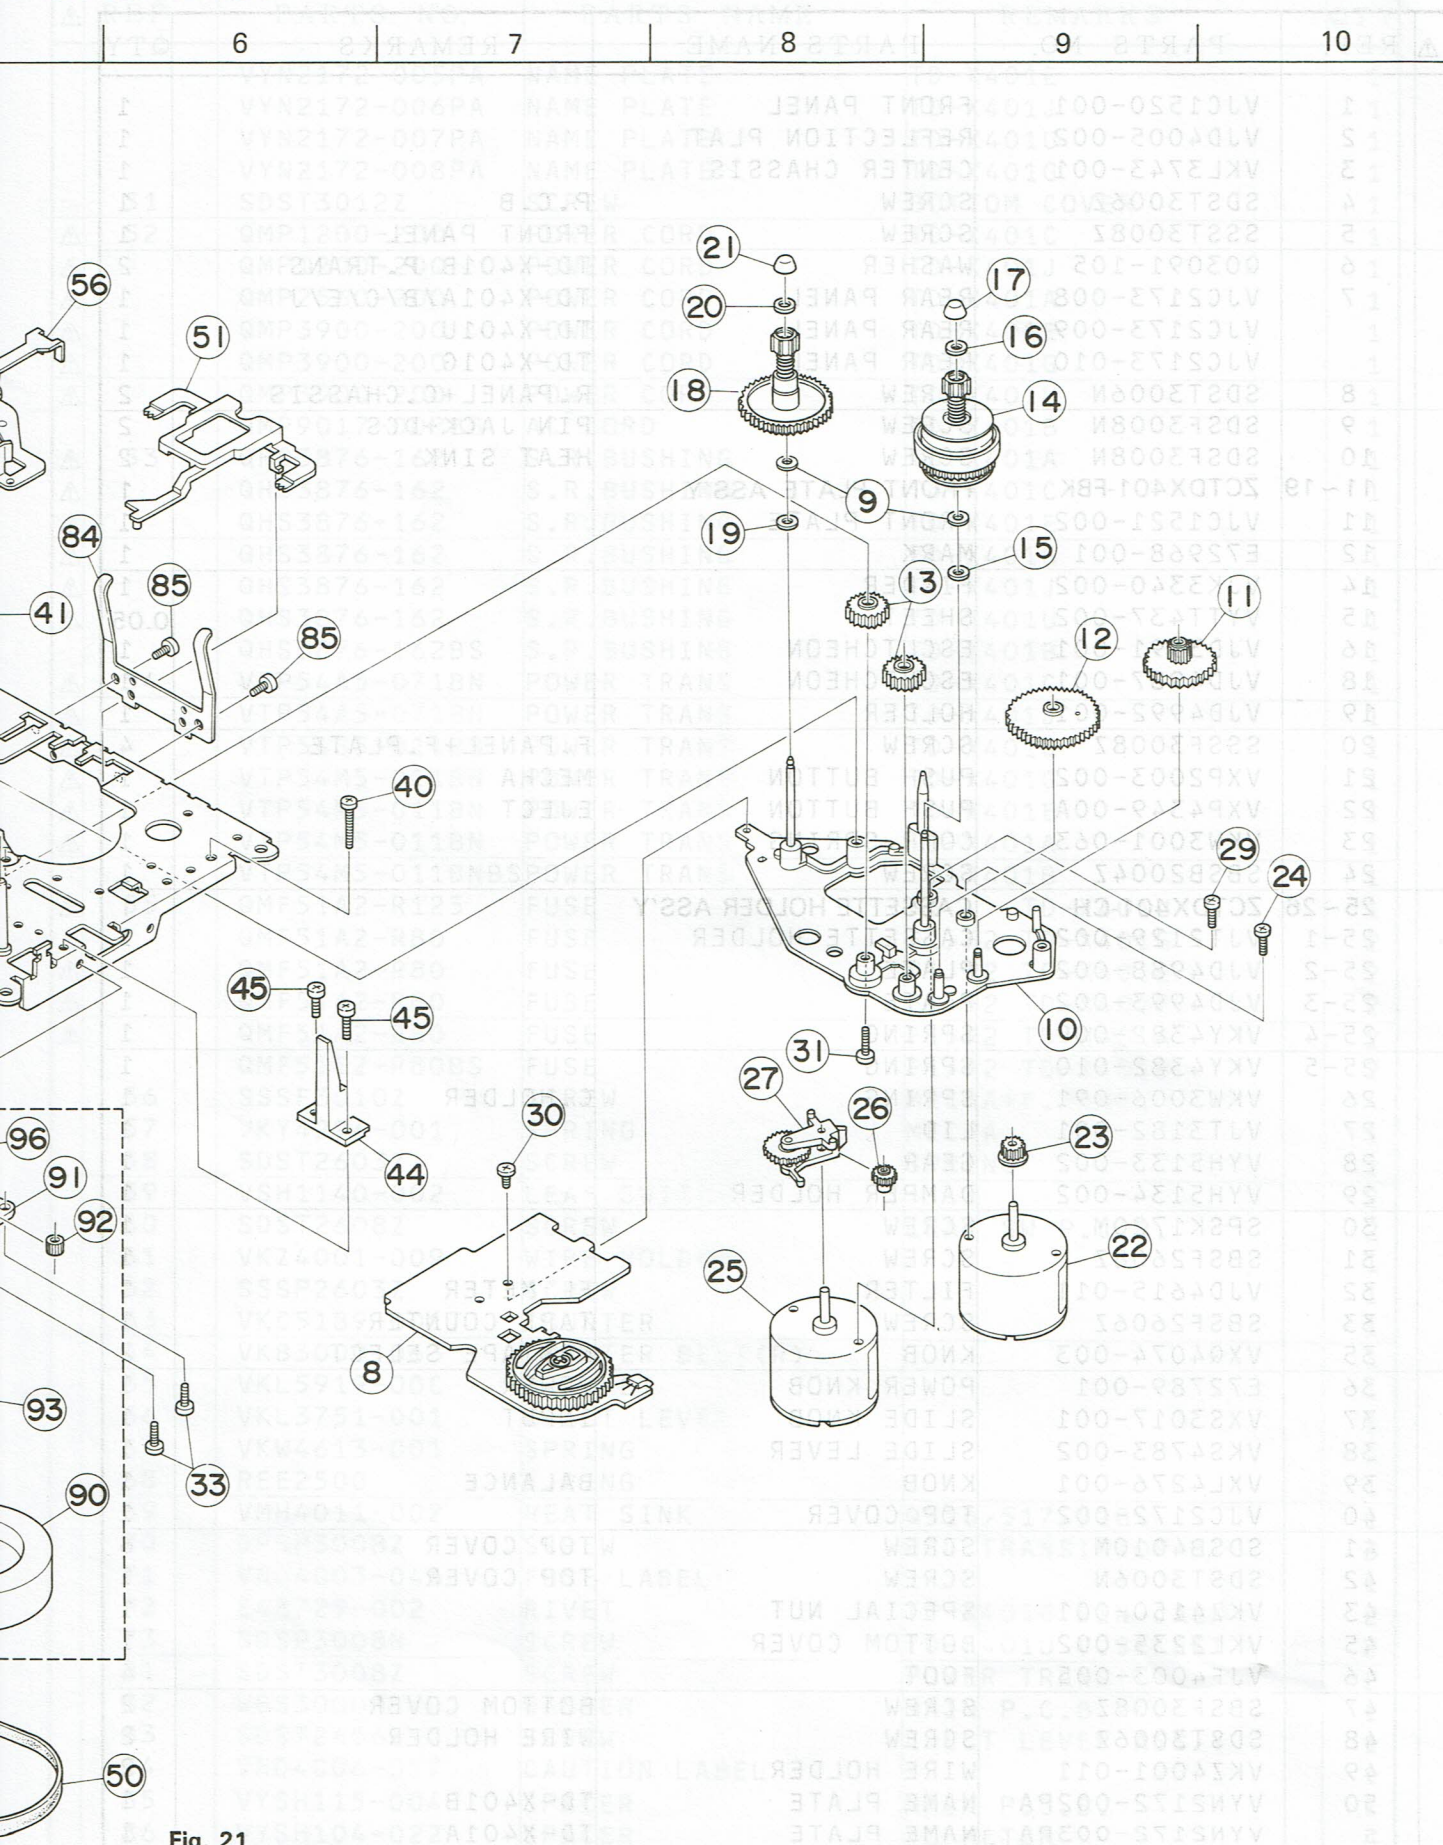


Fig. 21

Mechanism Assembly Parts List (1)

△ parts are safety assurance parts.

When replacing those parts, make sure to use the specified one.

△	REF.	PARTS NO.	PARTS NAME	REMARKS	QTY
	1	VKL2253-00F	CHASSIS BASE AS		1
	2	VKS2122-001	P.ROLLER CAM		1
	3	VKZ4003-010	FELT		1
	4	VKZ4284-003	WASHER		1
	8	VKZ3127-00F	CAM SWITCH ASSY	CAM SWITCH ASS'Y	1
	9	Q03093-834	WASHER		1
	10	VKL2174-003	DISK BASE		1
	11	VKR3001-001	GEAR(2)		1
	12	VKR3001-002	GEAR(2)		1
	13	VKR3000-001	GEAR(1)		2
	14	VKR4312-00B	REEL DISK ASS'Y		1
	15	VKZ4003-010	FELT	BACK TENSION	1
	16	VKR4170-001	RING		1
	17	VKS4131-001	REEL STOPPER		1
	18	VKR4318-00A	R.DISK ASS'Y		1
	19	VKZ4003-010	FELT	BACK TENSION	1
	20	VKR4170-001	RING		1
	21	VKS4131-001	REEL STOPPER		1
△	22	MMN-6C2RK	DC MOTOR	CAM	1
	23	VKR4326-001	MOTOR GEAR	CAM MOTOR	1
△	24	SDSP2606Z	SCREW	CAM MOTOR	1
△	25	MMN-6C2RK	DC MOTOR	REEL	1
	26	VKR3000-003	GEAR(1)	REEL MOTOR	1
	27	VKS4503-00D	ARM		1
	29	SDSP2606Z	SCREW	REEL MOTOR	1
	30	SDST2604Z	SCREW	CAM SWITCH	1
	31	SDST2608Z	SCREW	D.BASE UNIT	1
	33	SDST2605Z	SCREW		3
	34	VKL3682-001	BRACKET		1
	35	VKS4437-001	THRUST PLATE		1
△	36	MMI-6A2HUA	CAPSTAN MOTOR	CAPSTAN	1
	37	VKR4317-002	MOTOR PULLEY		1
	38	SSSP2604Z	SCREW	CAPSTAN MOTOR	2
	39	SDST2606Z	SCREW	F.M.BRACKET	2
	40	SPSP2615Z	SCREW	CAM MOTOR	1
	41	SPSP2613Z	SCREW	REEL MOTOR	1
	42	VKL3411-00B	TAKEUP IDLER		1
	43	VKW3006-099	TORSION SPRING	TAKE-UP	1
	44	VKS4901-001	CASSETTE GUIDE		2
	45	SDST2606Z	SCREW	CASSETTE GUIDE	4
	50	VKB3001-022	BELT	CAPSTAN	1
	51	VKS3162-003	BRAKE BAR		1
	52	VKW4380-001	TORSION SPRING	BRAKE BAR	1
	53	VKL5316-00E	H.BASE ARM ASSY		1
	56	VKL3421-00B	P.R.LEVER ASS'Y		1
	57	VKW4467-001	TORSION SPRING		1
	60	VKL3685-002	HEAD BASE		1
	61	VKW3001-080	SPRING		2
	62	SPSP2012Z	SCREW		1
	63	SPSX2012N	SCREW		1
	64	VKS2123-001	BASE		1
	65	VGH0212-104	ERASER HEAD	H1	1
	66	VGH0421-015	R/P HEAD		1
	67	SPSX2011N	SCREW		2

Mechansim Assembly Parts List (2)

△	REF.	PARTS NO.	PARTS NAME	REMARKS	QTY
	68	T41615-004	STEEL BALL	HEAD BASE	1
	69	VKY4425-002	SPRING PLATE	HEAD BASE	1
	72	VKP4169-00B	P.R.ARM ASS'Y		1
	73	VKW3006-130	SPRING	PINCH ROLLER	1
	74	VKW3006-142	SPRING	RETURN	1
	80	VKL5926-001	LEVER		1
	81	VKZ4323-001	SCREW		1
	84	VKY4279-001	PACK SPRING		1
	85	SDST2604Z	SCREW		2
	87	VKS4512-002	GUIDE		1
	88	SDST2606Z	SCREW		1
	90	VKF3138-00A	FLYWHEEL ASS'Y		1
	91	VKF4122-00C	CAPS.METAL ASSY		1
	92	VKR4180-002	ROLLER	TAKE-UP	1
	93	Q03093-622	WASHER	THRUST	1
	94	Q03093-827	WASHER	THRUST	1
	95	VKW3001-010	SPRING	THRUST	1
	96	Q03093-522	WASHER	OIL CUT	1
	98	VKW3001-159	SPRING		1
	99	VKZ4340-001	SCREW		1
	ICM1	DN6838A	I.C.		1

Packing and Packing Parts List

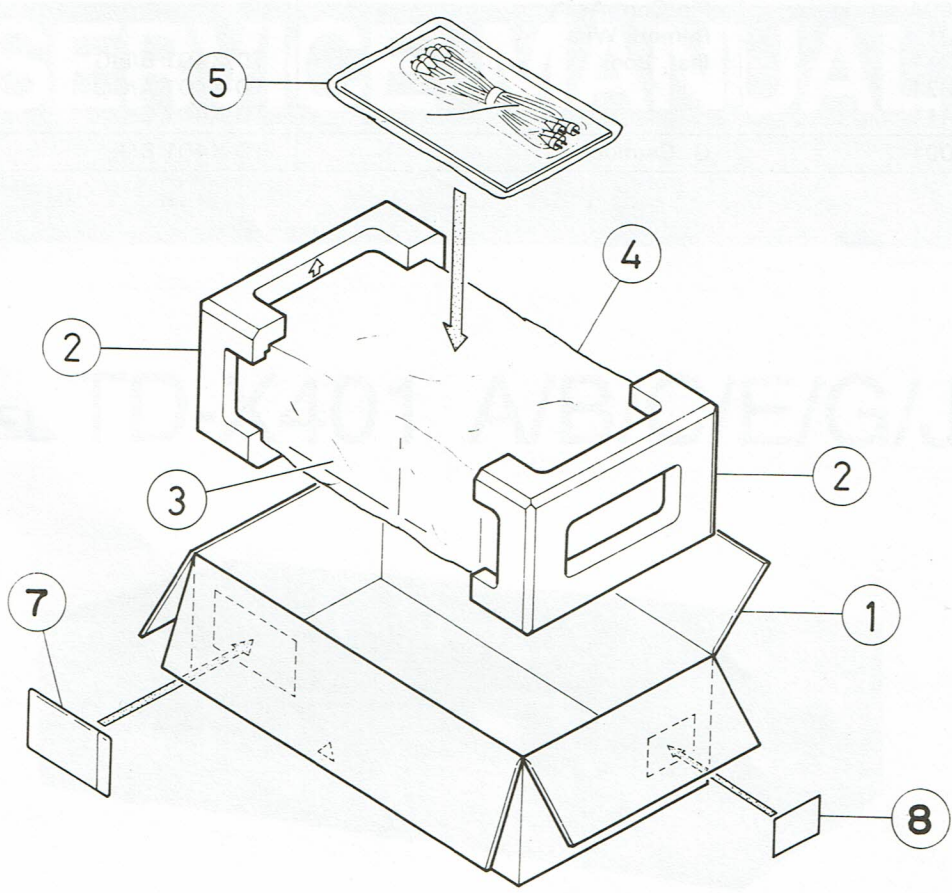


Fig. 22

Positions of control switch and knob at renewed packing

COUNTER	000
POWER	■ STAND BY
NR SYSTEM	OFF
TAPE	NORMAL
INPUT BAL.	CENTER
INPUT LEVEL	MIN

Packing Parts List

⚠ parts are safety assurance parts.
When replacing those parts, make sure to use the specified one.

⚠	Ref. No.	Parts No.	Parts Name	Remarks	Q'ty
	1	VPC2172-002	Carton	TD-X401 B	1
		" -003	"	TD-X401 A	1
		" -004	"	TD-X401 C	1
		" -005	"	TD-X401 E	1
		" -006	"	TD-X401 J	1
		" -007	"	TD-X401 U	1
		" -008	"	TD-X401 G	1
	2	VPH3165-002	Cushion		2
	3	VPK4002-006	Sheet	for Set	1
	4	VPE3005-025	Poly Bag	"	1
	5	" -007	"	for Accessories	1
	6	Q04141H	Wire Clamp	for Power Cord	1
	7	E66416-003	Envelope	TD-X401 J/U	1
	8	VPZ4001-001	Serial Ticket		1

Accessories

△ parts are safety assurance parts.

When replacing those parts, make sure to use the specified one.

△	Parts No.	Parts Name	Remarks	Q'ty
	VMP0039-00A	Pin Cord Ass'y		1
	EWP805-001	Remote Wire		1
	VNN2172-211	Inst. Book	TD-X401 B/E/G	1
	" -621	"	TD-X401 A/C/J	1
	" -411	"	TD-X401 E	1
	VND4113-001	G. Caution	TD-X401 B/J	1

JVC

VICTOR COMPANY OF JAPAN, LIMITED

AUDIO PRODUCTS DIVISION MAEBASHI PLANT 10-1, 1-chome, Ohwatari-cho, Maebashi-city, Japan



Printed in Japan
-6104-0-